



MDTA Series
 Flat Wire Molded Inductor
 Size 5030



Dimensions: [mm]

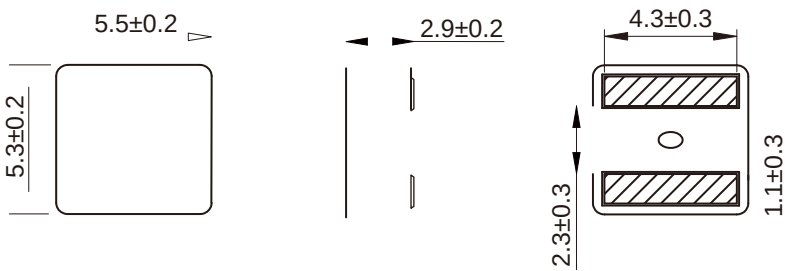

Land Pattern: [mm]




Electrical Properties:

L@100KHz / 0.1V

Typical Electrical Characteristics:

Soldering Reflow:

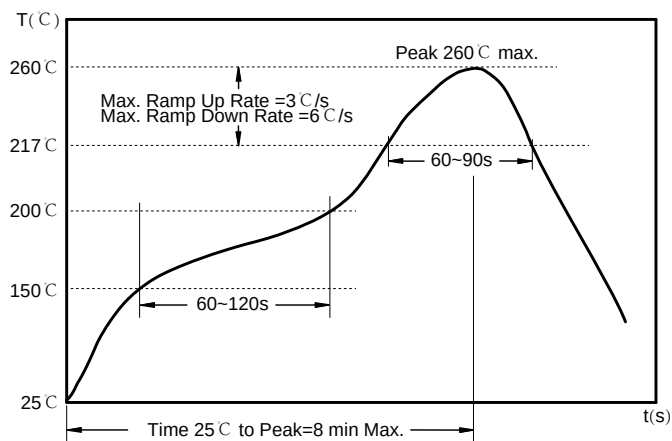


Preheat condition: $150 \sim 200^{\circ}\text{C} / 60 \sim 120 \text{ sec.}$
Allowed time above 217°C : 60~90 sec.
Max temperature: 260°C .
Max time at max temperature: 10 sec.
Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA5030	6.0 ± 0.1	5.7 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	16.0 ± 0.3	3.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

Peel force of top cover tape:

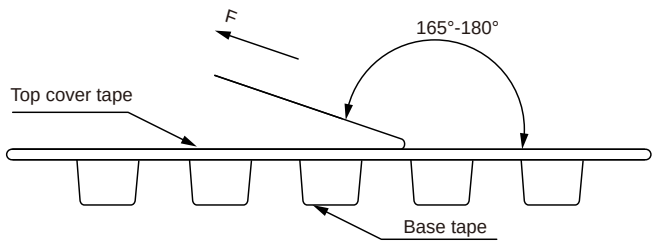

The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	Printing (Inductance)
---------	-----------------------



Reel Dimension: [mm]



Packaging Quantity: